



Trgovina Matejić d.o.o.

Birčaninova 1, 37000 Kruševac, Srbija

tel./fax.: +381 37 44 71 70

e-mail: info@matejic.rs



GB

Mini Kontaktor

ME-KC1-09M 9A, ME-KC1-12M 12A,
ME-KC1-16M 16A

IMPORTANT WARNING:

Please read the instructions carefully before installation and preserve it well. Recommend, the product must be installed and assembled by qualified electrician. Before installation, please cut off the main power. Do not turn the lamp on before the end of installation. Please use proper wire for connection. Opening and changes to the product by unauthorized personnel is not allowed for security reasons.

We recommend that connector sleeves be used when working with flexible conductors.

When connecting aluminium conductors, ensure that the contact surfaces of the conductors are cleaned, brushed and treated with grease. Re-tighten contacts terminals after 6 to 8 weeks' time.

MAINTENANCE:

Use only a cotton swab with a small amount of alcohol to clean the product body. Do not use strong chemicals. Take care that liquid does not enter inside the product.



This product can't be disposed on the end of-service with garbage from household, but should be postponed in a place for recycling electrical and electronic equipment. The alert is on the markings on the product itself, user's manual and box.

SRB MNE
HR BIH

Mini Kontaktor

ME-KC1-09M 9A, ME-KC1-12M 12A,
ME-KC1-16M 16A

VAŽNO UPOZORENJE:

Pre montiranja pažljivo pročitati uputstvo koje je priloženo uz svaki proizvod i sačuvati ga. Proizvod je potrebno da instalira kvalifikovano lice. Pre instaliranja proveriti vodove struje. Nemojte uključivati proizvod dok se ne završi instalacija. Koristite samo odgovarajuće žice za povezivanje. Otvaranje i izmene na ovom proizvodu od strane neovlašćenog osoblja nije dozvoljeno iz razloga sigurnosti.

Koristiti zaštitne rukavice ukoliko povezujete grebenasti prekidač sa licnastim provodnicima.

Kada povezujete aluminijumske provodnike, budite sigurni da su kontaktne površine na provodniku čiste. Dotegnuti kontakte nakon perioda između 6 - 8 nedelja.


ODRŽAVANJE:

Koristiti pamučnu krpu sa malom količinom alkohola za čišćenje proizvoda. Ne koristiti jaka hemijska sredstva. Paziti da tečnost ne uđe unutar proizvoda.



Ovaj proizvod se ne sme na kraju svog upotrebog roka odložiti uz normalno smeće iz domaćinstva, već treba biti odložena za to predviđeno mesto za recikliranje električnih i elektronskih uređaja. Na to Vas upozorava i oznaka na samom proizvodu, uputstvu za upotrebu ili na pakovanju.

Spoljne dimenzije i veličina ugradnje KC1-06M-16M

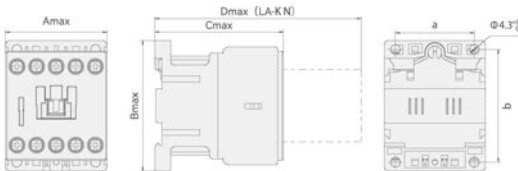


Model i specifikacije (mm)	Amax	Bmax	Cmax	Dmax	a	b
KC1-06M~16M	45.5	58.5	57.5	92	35	50

Instalacija proizvoda na šinu:

Kontaktor se prihvata montiranjem pomoću šrafova.

Tip KC1-06M-16M je dostupan za 35mm standardnu šinu.

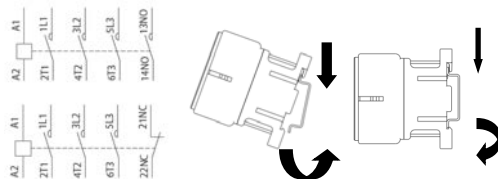

Instalacija i demontaža LA-KN dodatne kontakt grupe su prikazane u nastavku:


Za instalaciju:

1. Poravnajte kliznu tračnicu sa interfejsom kontaktora;
2. Pritisnite prema dole dok se zakretni spoj automatski ne zaključa.

Za demontažu:

1. Podignite zakretni spoj prema gore
2. Izvucite ga sa donje strane i uklonite ga duž klizne tračnice.

External dimension and installation size of KC1-06M-16M

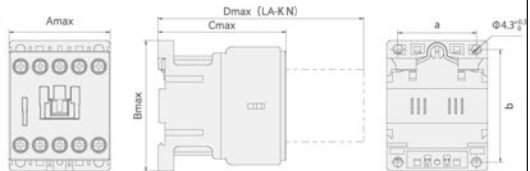


Model i specifications (mm)	Amax	Bmax	Cmax	Dmax	a	b
KC1-06M~16M	45.5	58.5	57.5	92	35	50

Installation of product guide rail:

The contactor it does excepted by screw mounting.

The type of KC1-06M~16M available for 35mm standard rail.

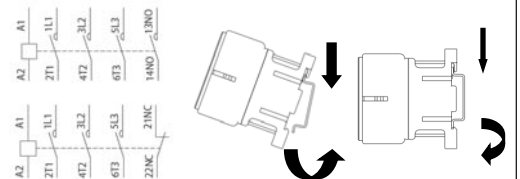

Installation and disassembly of LA-KN auxiliary contact group are shown as below:

To install:

1. Align the chute with the interface of the contactor;
2. Push downward till the snap joint automatically locks.

To disassemble:

1. Lift upward the snap joint
- 2) Withdraw it from bottom up and remove it along the chute.