



* Radni napon ovog proizvoda je DC12V, nikada nemojte nikada povezivati direktno na AC220V!!!

SRB

FS-IR25B LED kontroler 24 tastera 72W
za RGB: LED trake, LED module, LED lampe...

KARAKTERISTIKE:

Napajanje: 12V DC, 2A
Izlazni napon: 2A * 3 kanala
Radna temperatura: -20 C-60 C
Dimenzije kontrolera: L63 x W35 x H22 mm
Dimenzije daljinskog: L84,6 x W51,6 x H7,1mm
Domet daljinskog: 5~10m
Statistička potrošnja: 1W
IP zaptita: IP20



SRB

FS-IR44B LED kontroler 44 tastera 72W
za RGB: LED trake, LED module, LED lampe...

KARAKTERISTIKE:

Napajanje: 12V DC, 2A
Izlazni napon: 2A * 3 kanala
Radna temperatura: -20 C-60 C
Dimenzije kontrolera: L63 x W35 x H22 mm
Dimenzije daljinskog: L125 x W56 x H7,5mm
Domet daljinskog: 5~10m
Statistička potrošnja: 1W
IP zaptita: IP20





UPOZORENJE:

- Spajanje na samom kontroleru odgovara za RGB LED proizvode kao što su LED fleksibilne trakice, LED moduli...
- Ukoliko je snaga LED proizvoda veća od snage LED kontrolera savetujemo Vam da koristite odgovarajuća napajanja.
- Pre instalacije proveriti radni napon snage LED proizvoda, LED kontrolera, napajanja... (budite sigurni da je radni napon LED proizvoda DC 12V. Snaga LED proizvoda mora biti manja od snage kontrolera i napajanja).
- Instalaciju proizvoda treba da izvrši kvalifikovani električar. (Najpre isključiti dovod struje, pa zatim povezati dovodne vodove na napajanje, preko napajanja prevezati na kontroler i na kontroler montirati RGB LED traku, pratiti sliku ispod).
- Ne prekrivati i ne lepiti nalepnice na LED RGB kontroler.
- Koristiti samo odgovarajuće žice radi pravilnog rada.
- Nikada ne povezivati 2 žice direktno, kako bi ste izbegli "kratak strujni spoj ili udar".
- Pre nego što uključite napajanje na strujni dovod, molimo Vas da proverite ispravnost povezanih žica.

Smanjenje
osvetljenja

	Povećanje osvetljenja		Smanjenje osvetljenja		Isključivanje		Uključivanje
	Crvena		Zelena		Plava		Bela
	Narandžasta		Svetlo zelena		Tamno plava		Treperenje 7 boja
	Tamno žuta		Tirkizna		Braon		Treperenje sve boja se prelivaju
	Žuta		Svetlo plava		Roza		Prelivanje 7 boja
	Svetlo žuta		Nebo plava		Ljubičasta		3 osnovne boje se menjaju

	Povećanje osvetljenja		Smanjenje osvetljenja		Pauza / start		ON / OFF
	Crvena		Zelena		Plava		Bela
	Narandžasta		Svetlo zelena		Tamno plava		Mlečno Bela
	Tamno žuta		Tirkizna		Indigo plava		Pink Bela
	Žuta		Svetlo plava		Ljubičasta		Zeleno Bela
	Svetlo žuta		Nebo plava		Braon		Plavo Bela
	Pojačati crvenu		Pojačati zelenu		Pojačati plavu		Ubrzavanje
	Smanjiti crvenu		Smanjiti zelenu		Smanjiti plavu		Usporavanje
	Programiranje 1		Programiranje 2		Programiranje 3		Automatska promena boja
	Programiranje 4		Programiranje 5		Programiranje 6		Treperenje
	3-colour change		7-colour change		Prelivanje 3 boje		Prelivanje 7 boja

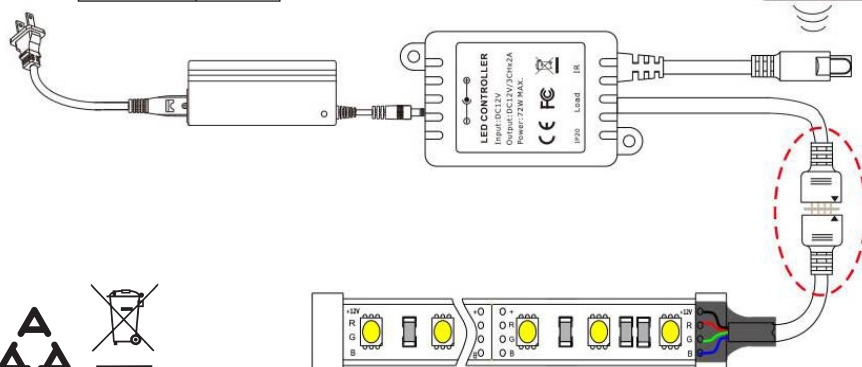

PROTECTION FROM BURNS AND FIRE

Do not operate the LED strip if the ambient temperature (Ta) exceeds 45° C (113° C). Do not modify the LED strip in any way not described in this manual or instal than genuine Mitea Lighting parts. Use only accessories approved by Mitea Lighting. If any of the product temperature readouts exceed the level, provide fan assistance to give active cooling to the installation.