




Trgovina Matejić d.o.o.
Birčaninova 1, 37000 Kruševac, Srbija
tel./fax.: +381 37 44 71 70
e-mail: info@matejic.rs

SRB/MNE

HR/BH

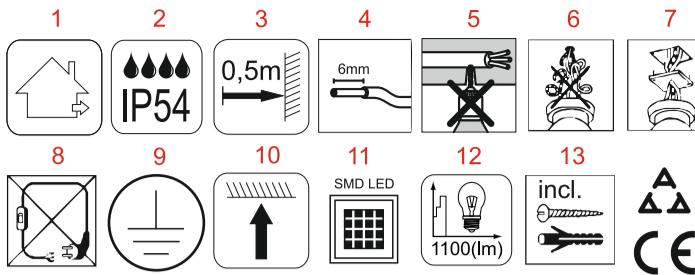

Radi Vaše bezbednosti, montažu izvršite na osnovu uputstva!!!

LEGENDA ZNAČENJA SIMBOLA

1. prvenstveno namenjene za unutrašnju i spoljni upotrebu
2. tip zaštite-otpornost na vlagu
3. minimalna dozvoljena udaljenost između rasvetnog tela i drugog predmeta
4. ukloniti izolaciju kao na slici
5. pazite da prilikom montaže rasvetnog tela ne bušite gde su strujni vodovi
6. obratite pažnju da ne dođe do ukrštanja žica prikljukom postavljanja
7. ukoliko se montira na razvodnu kućištu, poklopac postaviti pre montaže
8. povezivanje vršiti samo direktnim priključkom na električnu mrežu
9. lampu nema prilikujak za uzemljenje, DRUGI stepen zaštite
10. pravilno postavljanje rasvetnog tela
11. tip LED sjajice koju koristi rasvetno telo
12. lumen
13. dodatna oprema neophodna za montiranje - u kompletu sa proizvodom

Information about protection of environment

This lamp can't be disposed on the end of-service with garbage from household, but should be postponed in a place for recycling electrical and electronic equipment. The alert is on the markings on the product itself, user's manual and box.

The manufacturer / distributor no takes responsibility for damage or injury resulting from improper installation or improper use.

Zaradi vaše varnosti montirajte v skladu z navodili!!!

SIMBOLI:

1. tip zaštite – otporno na vlagu
2. otpornost na vlagu
3. najmanja dozvoljena razdalja med razsvetljave telesa in drugih predmetov
4. odstranite izolacijo kot je prikazano na sliki
5. pazite da med montiranjem ne vrtate kjer so električni vodi
6. pozornost, ne umršti žico
7. če montrirate na razvodno škatlo, pokrov postavite pred montažo
8. povežite le direktno na električno mrežo
9. DRUGI stopnja zaštite
10. pravilna montaža izdelka
11. tip sijalke, ki jih uporablja izdelak
12. maksimalna obremenitev
13. dodatna oprema potrebna za montažo je v dodana v kompletu s prizvodom

Pred montiranjem pazljivo preberite navodila ki so priložena ob vsakem izdelku in jih spraviti. Izdelek mora montirati usposobljena oseba. Pred montažo preverite električne vode. Izključite varovalko. Izdelka ne vključujte dokler se ne konča celotna montaža. Uporabljajte samo odgovarajoče kable za povezovanje. Izdelka ne montirajte v bližini aparativ za gretje ali hlajenje (kjer so pogosto spremenljivi temperaturni pogoji, npr.: klime, centralno gretje...). Ta izdelek se ne sme uporabljati otroci, osebe s fizičnimi, senzoričnimi ali psihičnimi sposobnostmi.

MONTAŽA:

Najprej izvratite dve luknjki v zidu in nato v njih vstavite plastične vložke (sidra). Privijte nosilec luči. Povežite električne vode s pomočjo terminala kakor je prikazano na diagramu 1. (crna ali rjava žica (L) = fazna, modra (N) = nula, rdeča (A)). Vključite varovalko. Nastavite zakanitve - gumbe (TIME), nastavitev svetlosti - tipka (LUX). Casovna zakanitve je nastavljiva v razponu od 10 sekund do 3 minut. Za nastavitev časovne zakanitve zavrite tipko v smeri urinega kazalca. Svetlost je nastavljiva med 3 – 2000 LUX-a. Če želite uporabljati senzor po danu in po noči zavrite tipko v obratno smeri urinega kazalca na SUN (). Če nastavite tipko na MOON (minimum) bo senzor deloval na osvetljenosti manjši od 3 LUX-a. V slabo osvetljenih okoliščinah – prostorih obrnite tipko v smeri urinega kazalca.

VZDRŽEVANJE:

Pred čiščenjem izključite osigurač i dovod struje. Koristite pamučnu krpu sa malom količinom alkohola za čiščenje okvira. Ne koristiti jaka hemijska sredstva. Paziti da tečnost ne dođe u dodir sa električnim delovima.

Upustvo za zaštitu čovekove okoline

Ovaj proizvod se ne sme na kraju svog upotrebnog roka odložiti uz normalno smeće iz domaćinstva, već treba biti odložena za to predviđeno mesto za recikliranje električnih i elektronskih uređaja. Na to Vas upozorava i oznaka na samom proizvodu, uputstvu za upotrebu ili na pakovanju.

Ni jedan deo uputstva za korišćenje se ne sme reproducirati na bilo koji način ili koristiti, kao što su prevođenje, adaptiranje ili vršiti transformacija teksta i znakova; bez dozvole. Sva prava zadržava Trgovina Matejić d.o.o.

Proizvajalec / distributer ne preuzima nikakvu odgovornost za štetu ili nezgodu nastalu zbog nestručne montaže ili neadekvatnog korišćenja

GB

For your safety, install according to the instructions!!!

LEGENDA:

1. indoor use and outdoor use
2. type of protection - moisture resistance
3. minimum distance from the other objects
4. remove insulation as shown on the picture
5. be careful when installing, do not drill where are the power lines
6. attention, do not cross the wires
7. if you install on a junction box, set the lid before
8. connect only with direct connection to the main power
9. second class protection
10. way of mounting
11. type of the LED
12. lumen
13. accessories required for installation - supplied with the product

INSTRUCTIONS FOR USER

Model: M272-73B-N LED wall lamp

Light source: 60 LED SMD

Power (estimated): 15W

Temp. light colors: 6000K

Lumen flux (nom.): 1100 (lm)

Operating voltage: 220V-240V AC / 50/60Hz,

Degree of protection: IP 54,

Electrical protection class: II degree

Ambient temperature: -20 ~ +40°C,

Recommended height for installation: 1.8 - 2.5m,

Ambient humidity: <93%RH.

IMPORTANT WARNING:

Please read the instructions carefully before installation and preserve it well. Recommend, the lamp must be installed and assembled by qualified electrician.

Before installation, please cut off the main power. Turn off the circuit. Do not turn the lamp on before the end off installation. Please use proper wire for connection.


Mount the product away from the heating and air conditioning devices (where the variable weather conditions). It is not intended that this product is used by children, persons with reduced physical, sensory or mental capabilities.

INSTALLATION:

Perforate 2 holes on the wall and fix the plastic expansion pieces in. Fix the base of the lamp to the wall with screws. Connect the power cables on the terminal blocks properly (black or brown wire (L) = live wire, blue (N) = zero, red (A)). Turn on the power. You can adjust distance detection (SENS) / time delay (TIME) / ambient light (LUX) using adjustment knobs. To adjust distance detection to a high level turn the adjustment knob clockwise. Max. detectable distance is 6 met. Time delay is adjustable from 10sec-3min. To increase time delay turn the adjustment knob counterclockwise. Ambient light sensitivity level is adjustable between 3 - 2000 LUX. To use sensor in daylight conditions please turn the knob SUN position (). When you turn LUX knob clockwise the appliance by turning the know clockwise.


MAINTENANCE:

Before cleaning turn off the fuse and power supply. Use only a cotton swab with a small amount of alcohol to clean the lamp body. Do not use strong chemicals.

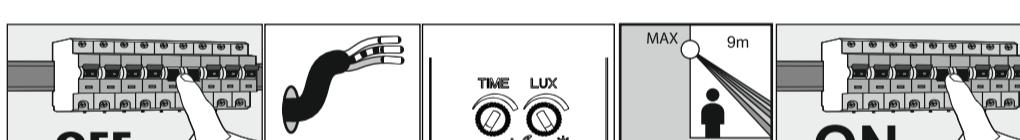


INSTALACIJA:


1. Isključite napajanje.
2. Skinite plastični poklopac da biste ga otvorili. (pogledajte sliku 1)
3. Provucite žicu kroz rupu na dnu i povežite žicu za napajanje u stub priključne žice prema dijagramu priključne žice. Instalirajte lampu u položaj gde vam je potrebno pomoću naduvanih vijaka. (pogledajte sliku 2)
4. Uključite napajanje i testirajte ga.

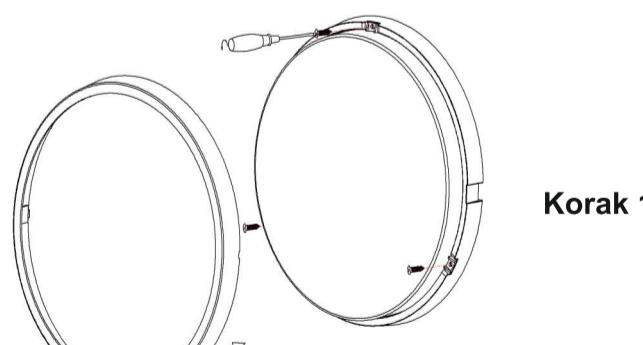


Korak 1

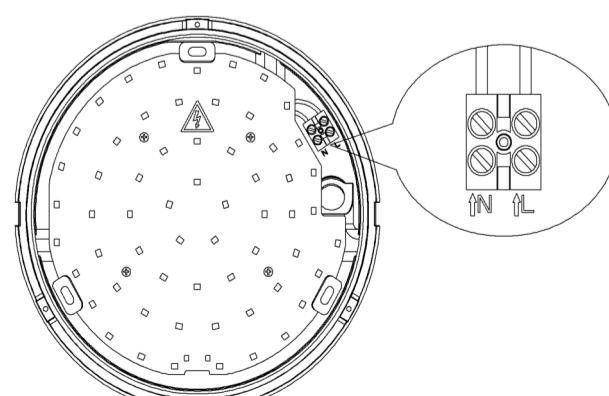

Dijagram povezivanja

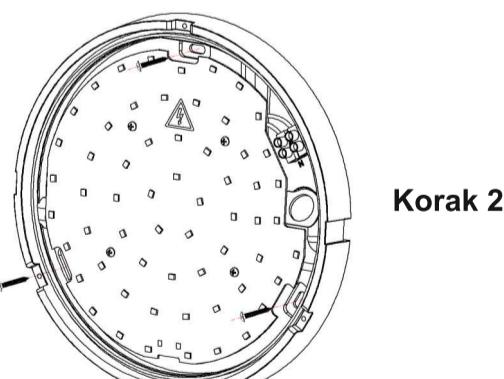

Korak 2

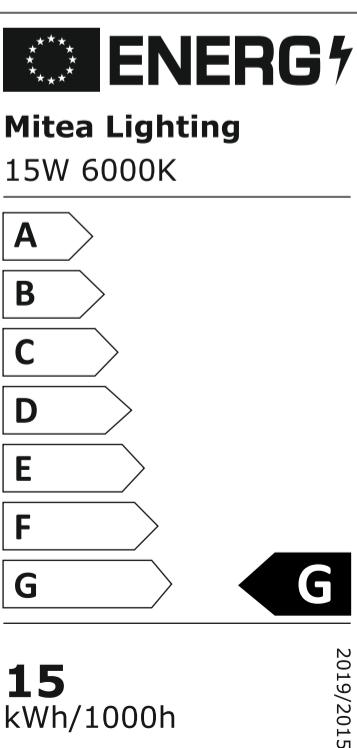

NAPOMENA:

- Električar ili iskusni čovek je preporučeno da ga instalira.
- Ne koristite proizvod ako je napukao.

2019/2015